


UHD 4K/60 HDMI MATRIX COMPACT SWITCHER 4X2 (XH-0402CT)



FEATURES

- Cross-switch 4 devices to 2 HDMI displays
- Support high resolution up to **true 4K@60Hz (4:4:4)**, with additional support for HDR
- HDMI 2.0/1.4 & HDCP 2.2/1.4 compliant
- Up to 600MHz pixel clock, 18Gbps link transmission
- Controllable via front-panel buttons, RS-232 and IR remote.
- Selectable 4 different EDID modes: Full HD/ Copy port 1/ Reserved/ Ultra HD
- Support LPCM 7.1, Dolby TrueHD, Dolby Digital and DTS-HD master audio
- Support 3D pass through
- Transmission is stable without signal lost
- Front-panel LED's for input/output signal presence
- Plug and play, easy installation
- Convenient firmware upgrade

APPLICATION DIAGRAM

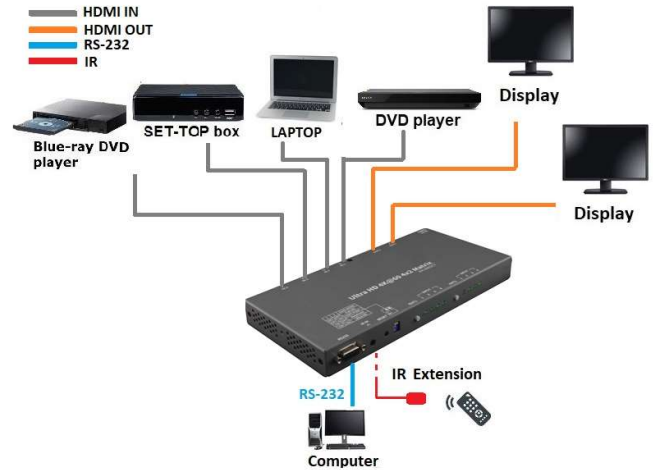

SPECIFICATION

Model	XH-0402CT
Video OUT	HDMI OUT x 2
Video IN	HDMI IN x 4
Compliance	HDCP1.4/2.2 ; HDMI1.4/2.0a
RS-232 control	DB-9 female x 1
IR control	3.5mm phone jack x 1
Max Resolution	4Kx2K@60(4:4:4/8bit)(4:2:0/12bit)
OUT1 SELECT LED	4
OUT2 SELECT LED	4
Selection button	Button *2 (Output 1 & Output 2)
HDMI transmission distance(max)	10M (HDMI cable)
Audio Support	Analog: 32K~192K 2CH PCM Digital: Dolby TrueHD, Dolby Digital/Plus EX, DTS, DTS-HD master
Power Supply	12V/1A DC
Enclosure	Metal
Weight	685g
Dimensions (LxHxM)	150x115x25mm